

Compact with Style Range

Vertical



24 vertical models

Heights: 1600mm to 2200mm

Lengths: 300mm to 700mm

Outputs: 693 to 2772 watts, 2365 to 9458 Btu/hr

Types: P2 & K2

BIM

5
FIVE YEAR
WARRANTY



@stelrad



facebook.com/stelradradiators



Stelrad®

Call **0844 543 6200** visit **Stelrad.com**

Leading the way

Stelrad Compact with Style Vertical

50 Δt (75/65/20°C)



Height	Length mm	Sections	Heat output			Heat output		
			UIN	Watts	Btu/hr	UIN	Watts	Btu/hr
1600	300	9	148140	693	2365	-	-	-
	500	15	148148	1155	3941	-	-	-
	600	18	148152	1386	4729	-	-	-
1800	300	9	148141	760	2593	-	-	-
	400	12	-	-	-	32182204	1476	5036
	500	15	148149	1266	4320	32182205	1845	6295
	600	18	148153	1519	5183	32182206	2214	7554
	700	21	-	-	-	32182207	2583	8813
2000	300	9	148142	824	2811	-	-	-
	400	12	-	-	-	32202204	1588	5405
	500	15	148150	1374	4688	32202205	1980	6756
	600	18	148154	1649	5626	32202206	2376	8107
	700	21	-	-	-	32202207	2772	9458
2200	300	9	148143	887	3026	32222203	1269	4330
	400	12	-	-	-	32222204	1692	5773
	500	15	148151	1479	5046	32222205	2115	7216
	600	18	148155	1775	6056	32222206	2538	8660

$\Delta t50$ is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C if you have a low temperature heat source you may wish to consider $\Delta t40$ or $\Delta t30$ output (see your installer or system designer).

Stelrad Compact with Style Vertical

40 Δt (65/55/20°C)

P2



K2



Height	Length mm	Sections	Heat output			Heat output		
			UIN	Watts	Btu/hr	UIN	Watts	Btu/hr
1600	300	9	148140	518	1769	-	-	-
	500	15	148148	863	2947	-	-	-
	600	18	148152	1036	3537	-	-	-
1800	300	9	148141	568	1940	-	-	-
	400	12	-	-	-	32182204	1104	3767
	500	15	148149	947	3231	32182205	1380	4709
	600	18	148153	1136	3877	32182206	1656	5651
	700	21	-	-	-	32182207	1932	6592
2000	300	9	148142	616	2103	-	-	-
	400	12	-	-	-	32202204	1188	4043
	500	15	148150	1028	3507	32202205	1481	5053
	600	18	148154	1233	4210	32202206	1777	6064
	700	21	-	-	-	32202207	2073	7075
2200	300	9	148143	663	2263	32222203	949	3239
	400	12	-	-	-	32222204	1266	4318
	500	15	148151	1106	3774	32222205	1582	5398
	600	18	148155	1328	4530	32222206	1898	6477

30 Δt (55/45/20°C)

P2



K2

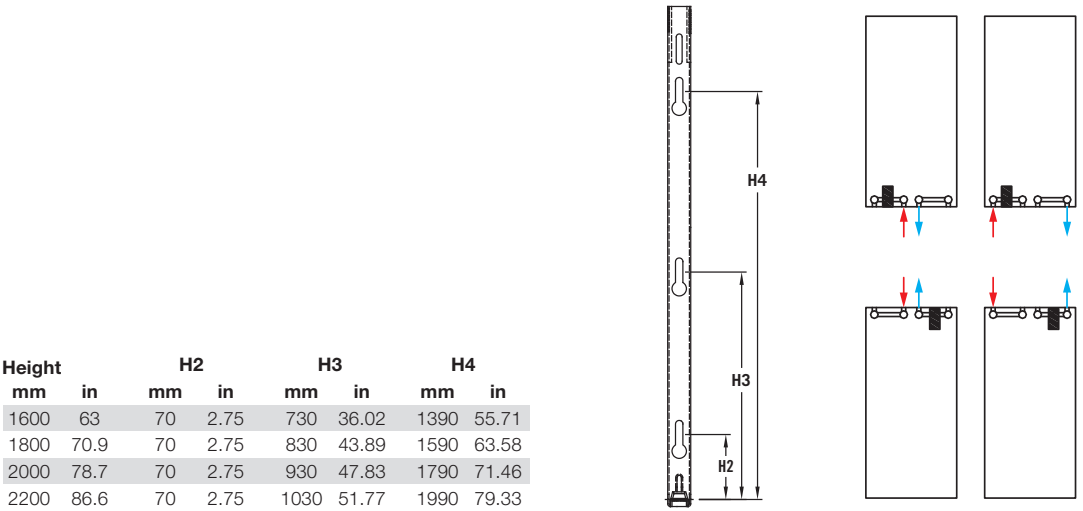


Height	Length mm	Sections	Heat output			Heat output		
			UIN	Watts	Btu/hr	UIN	Watts	Btu/hr
1600	300	9	148140	356	1217	-	-	-
	500	15	148148	594	2029	-	-	-
	600	18	148152	713	2435	-	-	-
1800	300	9	148141	391	1335	-	-	-
	400	12	-	-	-	32182204	760	2594
	500	15	148149	652	2225	32182205	950	3242
	600	18	148153	782	2669	32182206	1140	3890
	700	21	-	-	-	32182207	1330	4539
2000	300	9	148142	424	1448	-	-	-
	400	12	-	-	-	32202204	818	2784
	500	15	148150	708	2414	32202205	1020	3479
	600	18	148154	849	2897	32202206	1224	4175
	700	21	-	-	-	32202207	1428	4871
2200	300	9	148143	457	1558	32222203	654	2230
	400	12	-	-	-	32222204	871	2973
	500	15	148151	762	2599	32222205	1089	3716
	600	18	148155	914	3119	32222206	1307	4460

EN 442 Certification Data – CETIAT tested in accordance with BS EN 442

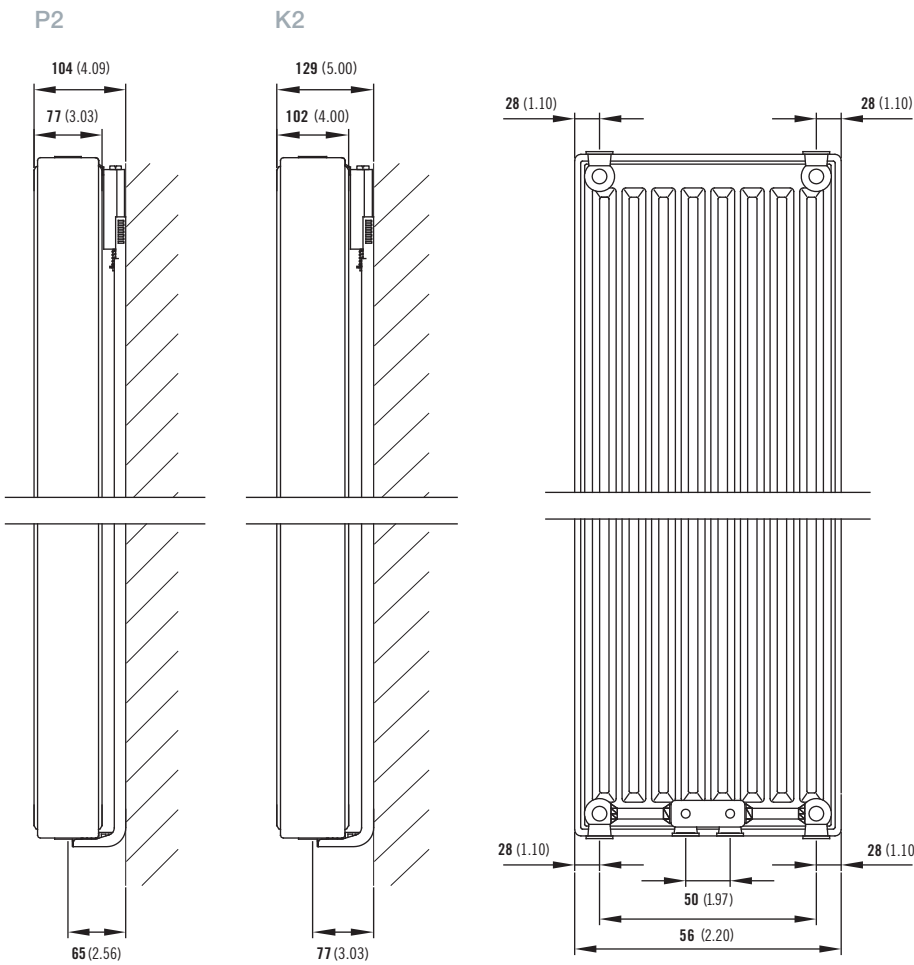
Type	P2				K2			
Height	1600	1800	2000	2200	1600	1800	2000	2200
W/m at 75/65/20	2310	2532	2748	2958	3420	3690	3960	4230
n-coefficients	1.27	1.27	1.27	1.27	1.32	1.32	1.33	1.33
Heated Surface Area (m ² /m)	7.33	8.25	9.17	10.09	28.99	29.90	37.74	38.66
Weight (kg/m)	77.70	86.70	95.40	105.60	94.20	105.30	116.40	126.60
Water Contents (l/m)	14.10	16.20	18.30	20.10	14.10	15.90	17.70	20.10
Wall to tap centre (mm)	65	65	65	65	77	77	77	77

Compact with Style Vertical mounted brackets and piping options



Compact with Style Vertical wall mounting information

All dimensions in mm. Inches in brackets.





STELRAD'S ADVANCED
HEATLOSS CALCULATOR

The Stelrad STARS Heatloss Calculator contains an inbuilt U value calculator.

Save time and effort by using the Stelrad STARS program - the perfect solution for accurate sizing and design flexibility.








Visit www.starsapp.co.uk

colourful inspiration





A shade for every room, for every interior. Opt for warm elegance, baroque ambience or modern minimalism. With Stelrad, you can heat your home in colour. Choose from a full range of stylish radiator colours.

Below colours for Compact with Style Range





Natural Colour

						
NT110 Papyrus white	NT120 Pearl white	NT130 Champagne	NT140 Beige	NT150 Beige grey	NT160 Pebble grey	NT170 Quartz grey
						
SN110 Cream white	SN120 Cream	SN130 Mocca	SN140 Bordeaux	SN150 Sepia	SN160 Pale blue	SN170 Black

Metallic Colours

						
ML110 Dove grey	ML120 Titanium grey	ML130 Blue grey	ML140 Granite	ML150 Cappuccino	ML160 Terra brown	ML170 Graphite black

RAL Colours

						
A1004 Golden yellow	A2003 Pastel orange	A3002 Carmine red	A3003 Robin red	A5002 Ultramarine blue	A6018 Yellow green	A7001 Silver grey
						
A7011 Iron grey	A7016 Anthracite grey	A7030 Stone grey	A7035 Light grey	A8017 Chocolate brown	A9003 Signal white	A9005 Jet black

Please note: When a coloured radiator or radiators over 2 metres have been ordered they cannot be cancelled or returned. All colour radiators have a 6 week lead time.

To request a colour chart and details of how to order please email marketing@stelrad.com